


Spherical roller bearings

R01	MA180418	VR/MA180418
-----	----------	-------------

23040 ECAW33S1

Main boundary dimensions (mm)	
d	200
D	310
B	82

Technical data			
Basic load ratings (kN)	Dyn.	C_r	1037
	Stat.	C_{0r}	1499
Mass (kg)		23,0	
Cage material		Brass	
Radius min (mm)	r₁	2,1	
	r₂	2,1	
	r₃	-	
	r₄	-	
Precision class		P0	
e		0,24	
Bearing clearance (mm)		C=0,160/0,220	
Configuration/Design		230/E/CA/W33	

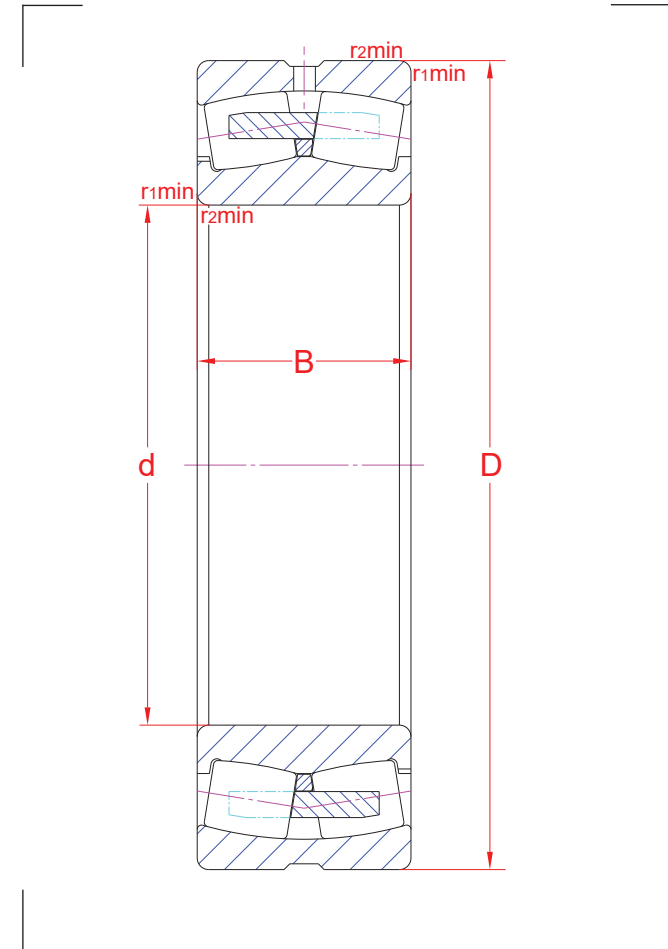

Technical notes
<ul style="list-style-type: none"> - Reference speed 1700 rpm - Limiting speed 1800 rpm - Optimized internal design with reinforced execution - Double pronged machined brass cage - Annular groove and lubrication holes in outer ring - Bearing rings heat stabilized for operating temperatures up to 200 °C - For general industry purpose

Sketch scale is free.
 Also refer to RKB Affidavit of Conformance (LJSA) for related compliance to International Standards.
 Every care has been taken to ensure the accuracy of the information in the present drawing but no liability can be accepted for any errors or omissions contained herein, or in case losses and/or damages (direct, indirect, consequential) should occur.
 RKB Bearing Industries reserves the right of any amendment without notice.