

Single row taper roller bearings


R01	LT060218	VR/MA060218
-----	----------	-------------

32314 AE

Main boundary dimensions (mm)	
d	70
D	150
T	54
B	51
C	42

Technical data			
Basic load ratings (kN)	Dyn.	C_r	356
	Stat.	C_{0r}	372
Mass (kg)		4,34	
Cage material		Pressed steel	
Radius min (mm)	r₁	3,0	
	r₂	3,0	
	r₃	2,5	
	r₄	2,5	
Precision class		Normal	
e		0,35/K factor 1,69	
Bearing clearance (mm)		-	
Configuration/Design		323/A/E	

Technical notes
<ul style="list-style-type: none"> - Reference speed 3250 rpm - Limiting speed 4300 rpm - Cage max protrusion 2,5 mm (cup large face side) and 6 mm (cup small face side) - Optimized internal design with reinforced execution - For general industry purpose

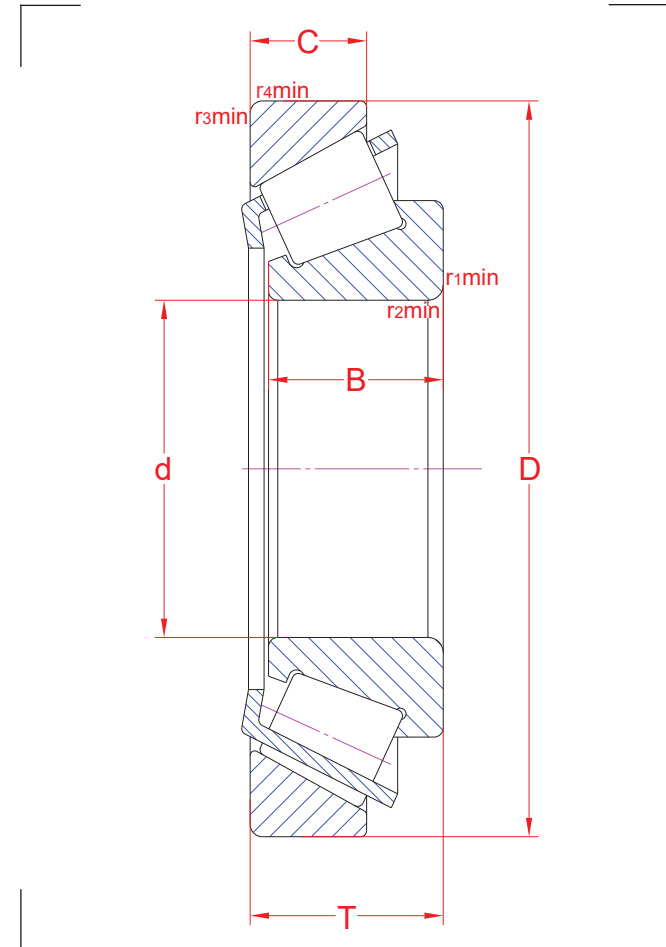

Sketch scale is free.

Also refer to RKB Affidavit of Conformance (LJSA) for related compliance to International Standards.

Every care has been taken to ensure the accuracy of the information in the present drawing but no liability can be accepted for any errors or omissions contained herein, or in case losses and/or damages (direct, indirect, consequential) should occur. RKB Bearing Industries reserves the right of any amendment without notice.