


Cylindrical roller bearings

R01	MA210518	VR/MA210518
-----	----------	-------------

NU 313 EMC3

Main boundary dimensions (mm)	
d	65
D	140
B	33
F	82,5

Technical data			
Basic load ratings (kN)	Dyn.	C_r	207
	Stat.	C_{0r}	193
Mass (kg)		2,2	
Cage material		Brass	
Radius min (mm)	r₁	2,1	
	r₂	2,1	
	r₃	2,1	
	r₄	2,1	
Precision class		P0	
e		-	
Bearing clearance (mm)		C3	
Configuration/Design		NU3/E/M	

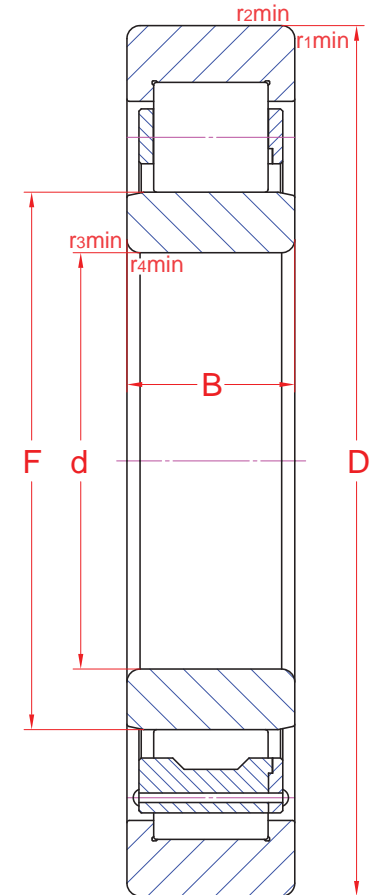

Technical notes

- Reference speed 5100 rpm
- Limiting speed 5200 rpm
- Permissible axial displacement 2,2 mm
- Optimized internal design with reinforced execution
- Machined brass cage guided on rollers
- For general industry purpose

Sketch scale is free.

Also refer to RKB Affidavit of Conformance (LJSA) for related compliance to International Standards.

Every care has been taken to ensure the accuracy of the information in the present drawing but no liability can be accepted for any errors or omissions contained herein, or in case losses and/or damages (direct, indirect, consequential) should occur. RKB Bearing Industries reserves the right of any amendment without notice.