

# Deep groove ball bearings

DC300617

SS 6007 2RS

## Main boundary dimensions (mm)


<b>d</b>	35
<b>D</b>	62
<b>B</b>	14

## Technical data

<b>Basic load ratings (kN)</b>	Dyn.	<b>C<sub>r</sub></b>	16,3
	Stat.	<b>C<sub>0r</sub></b>	10,2
<b>Mass (kg)</b>		0,16	
<b>Cage material</b>		Stainless steel	
<b>Radius min (mm)</b>	<b>r<sub>1</sub></b>	1,0	
	<b>r<sub>2</sub></b>	1,0	
<b>Precision class</b>		P0	
<b>Bearing clearance (mm)</b>		CN	
<b>Configuration/Design</b>		SS60/2RS	

## Technical notes

- Stainless steel AISI 420
- Limiting speed 5900 rpm
- Contact seal on both sides
- Standard bearing grease
- For general industry purpose

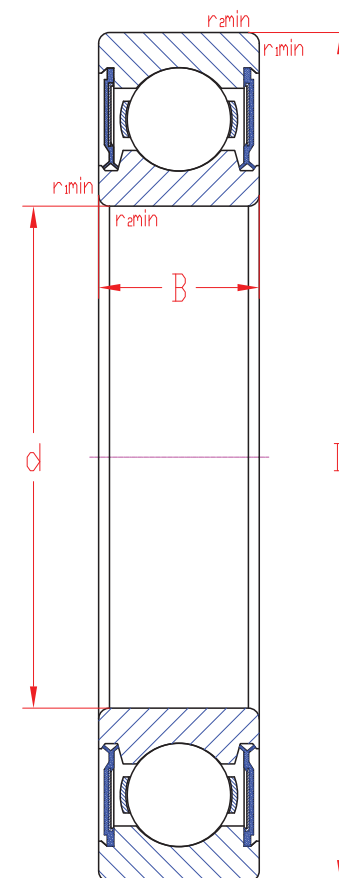

Sketch scale is free.

Also refer to RKB Affidavit of Conformance (LJISA) for related compliance to International Standards.

Every care has been taken to ensure the accuracy of the information in the present drawing but no liability can be accepted for any errors or omissions contained herein, or in case losses and/or damages (direct, indirect, consequential) should occur.

RKB Bearing Industries reserves the right of any amendment without notice.